



Galaxy

Specifications - Page 1 of 3

- Height ranges and # of treads required for each range are shown below
 - Extra treads for achieving each height range are included with each stair


Model Number	Stair Color	Rough Opening Dimension	Stair Frame Dimension	Tread Width	Tread Depth	# of Treads	Unit Weight	Floor-to-Ceiling Height Range	Projection (See Page 2)	Landing Space (See Page 2)
G2755	Gray	27 3/4" X 55 1/4"	27 1/4" X 53 3/4"	14"	4 1/2"	9	188 lbs.	7' - 2" to 7' - 10"	6"	51"
						10		Over 7' - 10" to 8' - 6"	11"	56"
						11		Over 8' - 6" to 9' - 6"	15"	61"
						12		Over 9' - 6" to 10' - 2"	20"	65"

- Other:
- * 30 minute fire rated door
 - * Electrical requirements - 110 volt standard receptacle within 6' of stair
 - * Maximum draw 4 amps (4 amps at start-up, drops to 1 amp while in motion)
 - * Maximum operating temperature - 158 degrees
 - * Can be manually operated in case of power loss



Galaxy

Specifications - Page 2 of 3

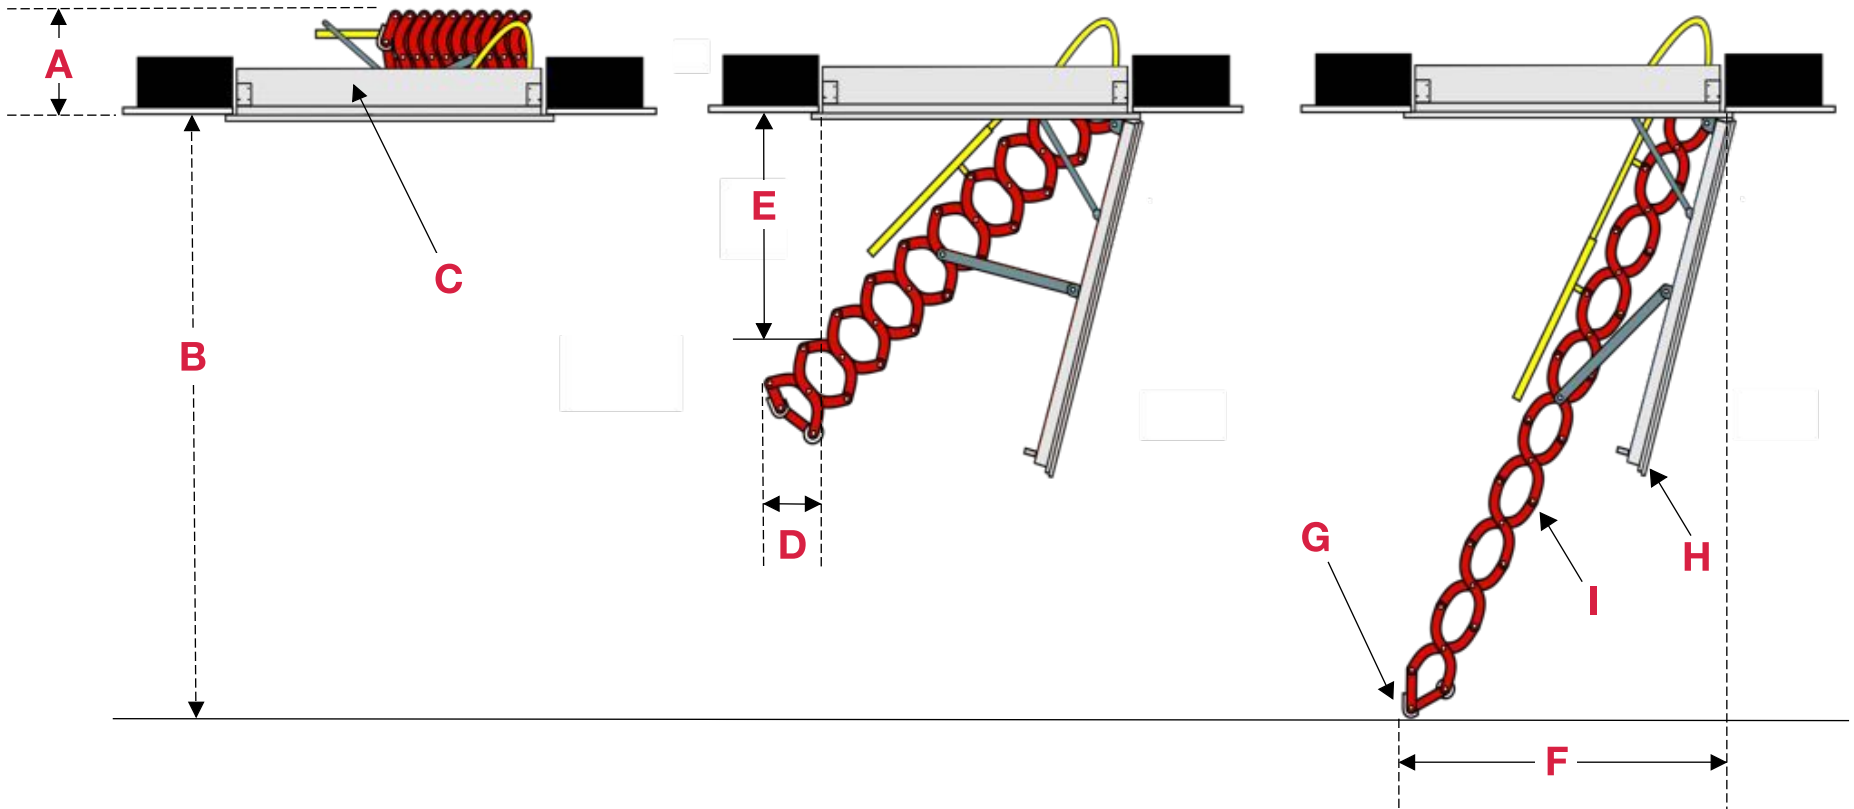

A. Folded stair height - 17 1/2"
B. Floor to ceiling height
C. Frame height - 10 1/2"

D. Projection (see chart - page 1)
E. Height from ceiling at start of projection:
 9 treads = 56 1/2"
 10 treads = 41"
 11 treads = 39 1/2"
 12 treads = 39"

F. Landing space (see chart - page 1)
G. Only front bumpers touch floor
H. Door angle - 76 degrees
I. Stair angle - 70 degrees



Galaxy

Specifications - Page 3 of 3

Inside and Outside Frame Dimensions

Rough Opening
27 3/4" X 55 1/4"

Outside Frame Dimension
27 1/4" X 54 3/4"

